

VALVES

GAUGE ISOLATOR - SUB-PLATE MOUNTING VALVE

Description

Seal type valve.

Swivelling gauge connection for easy gauge positioning.


Compact assembly.

Eliminates gauge supporting bracket.

Angular gauge face plane in Sub- Plate mounting construction facilitating easy gauge reading.



ORIENT ENGINEERING WORKS

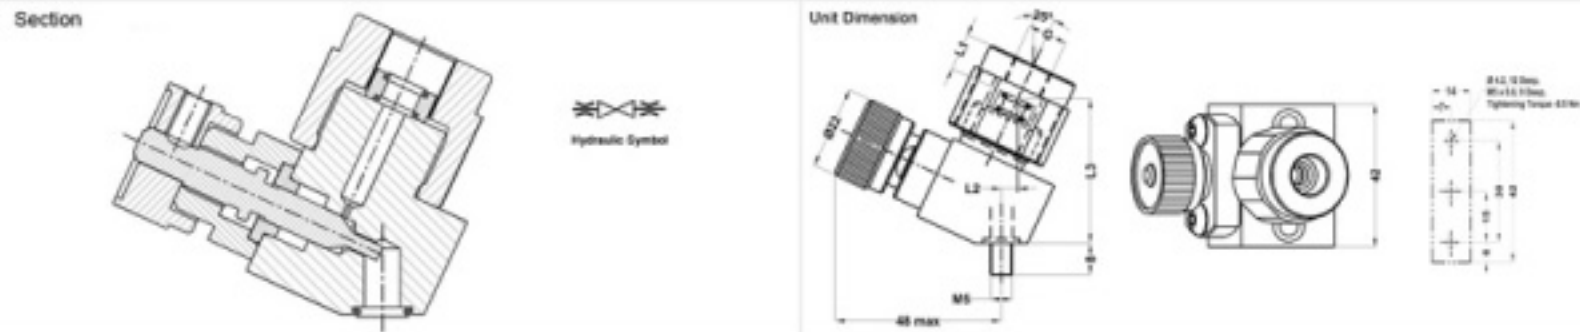

Part#	G	L1	L2	L3
GI-SPM-G1/4	G1/4	10.5	4.0	38.5
GI-SPM-G3/8	G3/8	10.5	4.0	39.0
GI-SPM-G1/2	G1/2	12.5	4.0	39.0

TECHNICAL SPECIFICATION

CONSTRUCTION --- SEAT TYPE

MOUNTING --- SUB-PLATE MOUNTING INTERFACE / PANEL MOUNTING
INTERFACE STANDARD --- FACTORY STANDARD.

MOUNTING POSITION --- OPTIONAL.

OPERATING PRESSURE --- 350 BAR.

HYDRAULIC MEDIUM --- MINERAL OIL.

VISCOSITY RANGE --- 10 CST TO 380 CST.

FLUID TEMPERATURE RANGE --- -20° C TO +70° C.

FLUID CLEANLINESS REQUIREMENT --- AS PER ISO 19/16 OR BETTER.

MASS --- 0.3 KG.