


WELDABLE TYPE FITTINGS

WNR - REDUCER WELDABLE NIPPLE



ORIENT ENGINEERING WORKS

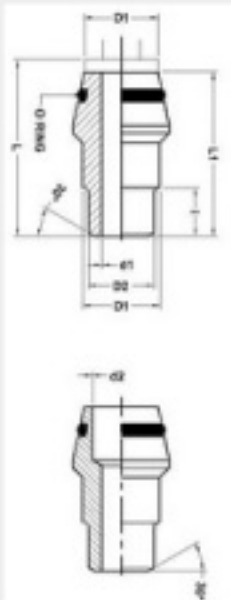

Part No.	Working Pressure NP of Fitting	Max. Pressure PB for WNR & Tube	O Ring	L	L1	D1	D2	d1	d2	i
WNR 10/06 X 1.5	630	528	7 X 1.5	33.5	32.5	10	8	3	5	12
WNR 10/08 X 2.0	630	528	7 X 1.5	33.5	32.5	10	8	4	-	12
WNR 12/08 X 2.0	630	528	9 X 1.5	33.5	32.5	12	8	4	6	14
WNR 12/10 X 1.5	630	358	9 X 1.5	33.5	32.5	12	10	7	-	14
WNR 16/12 X 2.5	400	476	12 X 2	40.5	38.5	16	12	7	-	15
WNR 20/12 X 2.5	400	476	16.3 X 2.4	47	44.5	20	12	7	-	17
WNR 20/16 X 3.0	400	435	16.3 X 2.4	47	44.5	20	16	10	-	17
WNR 25/16 X 3.0	400	435	20.3 X 2.4	53.5	49.5	25	16	10	-	20
WNR 25/20 X 4.0	400	460	20.3 X 2.4	53.5	49.5	25	20	12	-	20
WNR 30/16 X 2.0	400	305	25.3 X 2.4	57.5	52	30	16	12	-	22
WNR 30/20 X 2.5	400	305	25.3 X 2.4	57.5	52	30	20	15	-	22
WNR 30/25 X 3.0	400	294	25.3 X 2.4	57.5	52	30	25	19	-	22
WNR 38/16 X 2.0	250	305	33.3 X 2.4	64.5	56.5	38	16	12	-	26
WNR 38/20 X 2.5	250	305	33.3 X 2.4	64.5	56.5	38	20	15	-	26
WNR 38/25 X 3.0	250	294	33.3 X 2.4	64.5	56.5	38	25	19	-	26
WNR 38/30 X 4.0	250	323	33.3 X 2.4	64.5	56.5	38	30	22	-	26